



ARCOL[®] F-3222

Polyether Polyol

Product Code: **KLF3222**

Description

Arcol F-3222 polyol is a 3,200-molecular weight triol used in the production of one-shot flexible urethane slabstock foams. The full range of flexible foams from extra super soft to extra firm, with varying densities, can be made with Arcol F-3222 polyol. It provides an optimized balance of foam hardness, mechanical properties and processing ease, while maintaining yields. As with any product, use of the Arcol F-3222 polyol in a given application must be tested (including but not limited to field testing) in advance by the user to determine suitability.

Product Specifications

Property	Value
Hydroxyl Number	50.5–53.5 mg KOH/g
Water, (max)	0.05 Wt. %
Acid Number (max)	0.02 mg KOH/g
Color, APHA (max)	50

Typical Properties*

Property	Value
Appearance	Clear, viscous liquid
Viscosity at 25°C	520 cps
Specific Gravity at 25°C	1.02
Flash Point, PMCC	>200°C
Bulk Density at 25°C	8.6 lb/gal

Storage

Arcol F-3222 polyol is slightly hygroscopic and may absorb water. Containers should be kept tightly closed and protected from contamination with moisture and foreign materials, which can adversely affect processing.


This polyol can become quite viscous at low temperatures. For ease of handling, storage temperatures between 20°C (68°F) and 60°C (140°F) are recommended.

Health and Safety Information

Appropriate literature has been assembled which provides information concerning the health and safety precautions that must be observed when handling the Arcol F-3222 polyol. Before working with this product, you must read and become familiar with the available information on its hazards, proper use, and handling. This cannot be overemphasized. Information is available in several forms, e.g., material safety data sheets and product labels. Consult your Bayer MaterialScience representative or contact Bayer MaterialScience's Product Safety and Regulatory Affairs Department in Pittsburgh, Pa.

* These items are provided as general information only. They are approximate values and are not part of the product specifications.

Viscosity vs. Temperature** for Arcol F-3222 Polyol

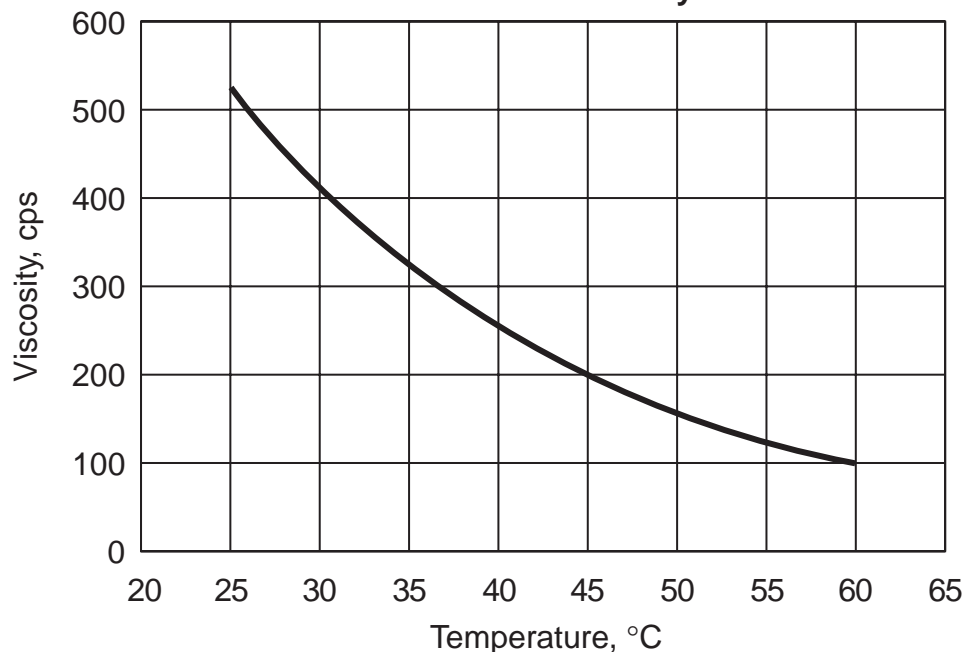

** Data presented in this chart is derived from a single sample and may vary from the typical properties information, which represents values derived by averaging data from various samples.

Note: The information contained in this bulletin is current as of September 2001. Please contact Bayer MaterialScience LLC to determine whether this publication has been revised.

Bayer MaterialScience LLC

100 Bayer Road • Pittsburgh, PA 15205-9741 • Phone: 1-412-777-2000 • www.BayerMaterialScienceNafta.com

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by us. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent.

6102 9/01

Printed on recycled paper 